


STAINLESS STEEL SHOKSTOPS



2SS-100SS

WADE WATER HAMMER ARRESTERS EMPLOY A PERMANENTLY SEALED AIR CHAMBER TO ABSORB ENERGY FROM COMMON WATER HAMMER. UNITS SHOULD BE SIZED IN ACCORDANCE WITH PDI STANDARD WH-201.

WADE WATER HAMMER ARRESTORS ARE MAINTENANCE FREE - THE USE OF ACCESS DOORS IS NOT REQUIRED

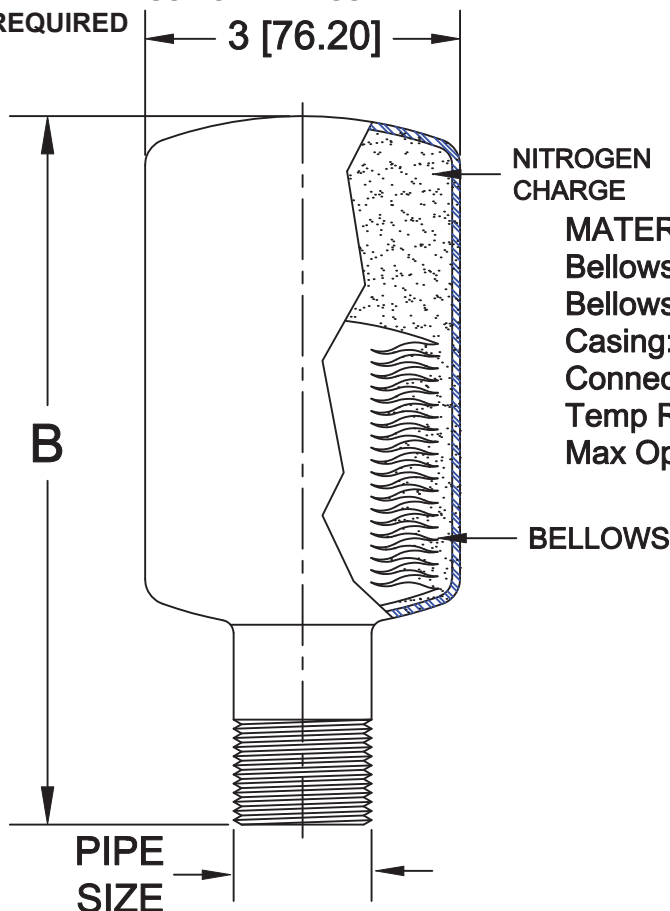

MATERIAL SPECIFICATIONS:

Bellows Content: Nitrogen

Bellows: Stainless Steel

Casing: Stainless Steel

Connection: Male NPT

Temp Range: -100° F to 300° F

Max Operation Pressure: 250 PSI

CATALOG NUMBER	P.D.I. SYMBOL	FIXTURE UNIT RATING	PIPE SIZE	B
2SS	AA	1-11	1/2" (12.5)	2 1/8 (54)
5SS	A	1-11	3/4" (19)	2 1/8 (54)
10SS	B	12-32	1" (25)	4 (102)
20SS	C	33-60	1" (25)	4 3/8 (111)
50SS	D	61-113	1" (25)	5 1/2 (140)
75SS	E	114-154	1" (25)	6 15/16 (176)
100SS	F	155-330	1" (25)	6 15/16 (176)

Wade Shokstops are certified under Plumbing & Drainage Institute Standard WH-201 and American Society of Sanitary Engineers Standard ASSE-1010. Certifications are available upon request.

Wade Shokstops are maintenance free and are approved for sealed wall installations.